

VIZZONI

TIRES

STRENGTH
IN EVERY LOAD

CATALOGUE

VIZZONI OTR & INDUSTRIAL - BIAS

THE CONFIDENCE BEGIN HERE

WELCOME TO THE WORLD VIZZONI

ABOUT VIZZONI

With more than 10+ years of worldwide presence, VIZZONI TIRES is committed to providing remarkable quality and high safety standards for tires of every kind. Our brand promises to go above and beyond to provide you with the best-performing tires.

A smooth affair - Vizzoni Tires aims to offer a driving experience that delivers the utmost comfort, excellent braking mechanism, and maximum safety to those on-road.

We cater to all your demands by offering a versatile and vast range to pick from as per your need.

Vizzoni Tires has a comprehensive understanding of tires and unlocks the potential of “one brand, several options”. Hence we offer solutions for Passenger Car Radials, High Performance, Ultra High Performance, 4x4 & SUV, VAN - Commercial, Truck Bus Radial, OTR - Radial, OTR - Bias, Industrial & Agricultural.





Off-The-Road Tires

Loader & Earthmover Tires

Grader Tires

L5 & Underground L5S Tires

Mining & Dump Truck Tires

Desert Tires



VZE34



SIZE	PR	PATTERN	TRA	Standard Rim	New Inflated Sizes (mm)		Maximum Load (Kg)		Air Pressure (Kpa)	
					S.W.	O.D.	50Km/h	10Km/h	65/50 Km/h	10 Km/h
33.25-29	38	VZE34	E3/L3	27.00/3.5	845	2090	17000	25750	400	525
29.5-29	28	VZE34	E3/L3	25.00/3.5	750	1975	12150	19000	325	425
29.5-25	28	VZE34	E3/L3	25.00/3.5	750	1875	11500	17500	325	425
26.5-25	24	VZE34	E3/L3	22.00/3.0	675	1750	9250	14000	300	400
23.5-25	20	VZE34	E3/L3	19.50/2.5	595	1615	7300	10900	300	375
20.5-25	20	VZE34	E3/L3	17.00/2.0	520	1490	6000	9500	325	450
17.5-25	20	VZE34	E3/L3	14.00/1.5	445	1350	5000	8250	400	575
16.00-25	28	VZE34	E3/L3	11.25/2.0	430	1495	6700	11500	575	750
16.00-24	28	VZE34	E3/L3	11.25	430	1495	6700	11150	575	750
18.00-25	36	VZE34	E3/L3	13.00/2.5	495	1615	9250	16000	625	850
15.5-25	12	VZE34	E3/L3	12.00/1.3	395	1275	3250	5600	250	400
14.00-25	24	VZE34	E3/L3	10	375	1370	5150	9500	575	850
1400-24	20	VZE34	E3/L3	10.00	375	1370	4625	8500	475	700
16/70-20	18	VZE34	E3/L3	13(SDC)	410	1075	3350	5800	450	550
16/70-24	14	VZE34	E3/L3	13(SDC)	410	1175	3350	5600	350	450
23.5/70-16	14	VZE34	E3/L3	6.50H	345	920	1600	/	320	/
20.5/70-16	16	VZE34	E3/L3	6.50H	318	900	1600	/	320	/
1200-16	12	VZE34	E3/L3	6.50H	280	900	/	/	/	/
1000-16	12	VZE34	E3/L3	6.50H	255	890	/	/	/	/





VZE42 E4-PORT




SIZE	PR	PATTERN	TRA	Standard Rim	New Inflated Sizes (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					S.W.	O.D.		
1800-25	40	VZE42	E4 -PORT	13.00/2.5	495	1675	27600	1100
1400-24	32	VZE42	E4 -PORT	10.00	375	1370	10500	1025
2100-25	40	VZE42	E4 -PORT	15.00/3.0	575	1750	20600	825



VZE42 E4



SIZE	PR	PATTERN	TRA	Standard Rim	New Inflated Sizes (mm)		Maximum Load (Kg)		Air Pressure (Kpa)	
					S.W.	O.D.	50Km/h	10Km/h	65/50 Km/h	10 Km/h
18.00-25	36	VZE42	E4	13.00/2.5	500	1615	9250	16000	625	850
18.00-33	36	VZE42	E4	13.00/2.5	500	1820	10600	18500	625	850
21.00-35	36	VZE42	E4	15.00/3.0	570	2050	12850	23000	550	750
24.00-35	42	VZE42	E4	17.00/3.5	655	2175	16500	29000	550	750
1200-24	20	VZE42	E4	8.5	315	1245	3750	6900	550	825

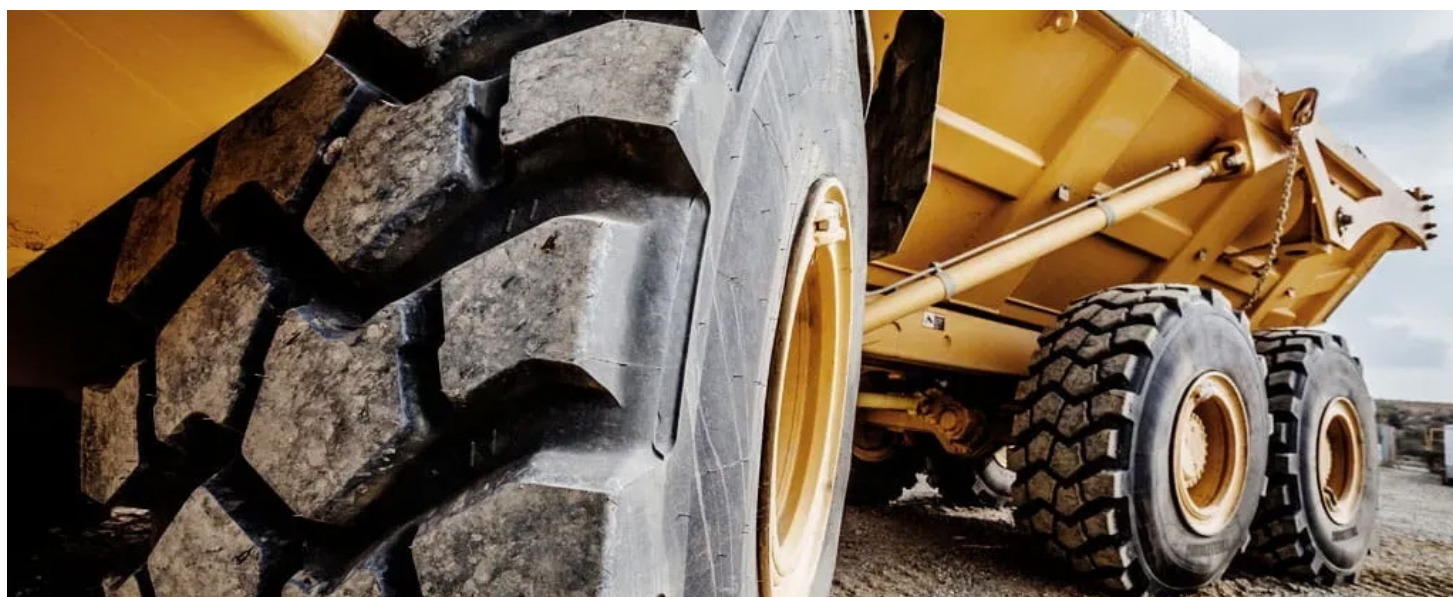



VZE45A E3/L3



SIZE	PR	PATTERN	TRA	Tread Depth (mm)	Standard Rim	New Inflated Sizes (mm)		Maximum Load (Kg)		Air Pressure (Kpa)	
						S.W.	O.D.	50Km/h	10Km/h	65/50Km/h	10 Km/h
29.5-25	28	VZE45A	E3/L3	38	25.00/3.5	750	1975	12150	19000	325	425
26.5-25	24	VZE45A	E3/L3	36	22.00/3.0	675	1750	9250	14000	300	400
23.5-25	20	VZE45A	E3/L3	32	19.50/2.5	595	1615	7300	10900	300	375
20.5-25	20	VZE45A	E3/L3	30	17.00/2.0	520	1490	6000	9500	300	450
17.5-25	20	VZE45A	E3/L3	26	14.00/1.5	445	1350	5000	8250	400	575
16/70-20	18	VZE45A	E3/L3	22	13(SDC)	410	1075	3350	5800	450	550
23.5/70-16	14	VZE45A	E3/L3	18.5	10.00E	345	920	1600	/	320	/
20.5/70-16	16	VZE45A	E3/L3	18.5	10.00E	318	900	1600	/	320	/



VZG21



SIZE	PR	PATTERN	TRA	Standard Rim	New Inflated Sizes (mm)		Maximum Load (kg)		Air Pressure (Kpa)	
					S.W.	O.D.	40Km/h	10Km/h	40 Km/h	10 Km/h
1300-24	12	VZG21	G2 / L2	8.00TG	335	1280	2725	5600	300	450
1400-24	16	VZG21	G2 / L2	8.00TG	360	1350	3650	7300	375	550



VZG22



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					S.W.	O.D.		
15.5-25	12	VZG22	G2 / L2	12.00/1.3	395	1275	2650	225
17.5-25	16	VZG22	G2 / L2	14.00/1.5	445	1350	3350	275
20.5-25	16	VZG22	G2 / L2	17.00/2.0	520	1490	4000	225
23.5-25	20	VZG22	G2 / L2	19.50/2.5	595	1615	4750	200





VZE40s



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					S.W.	O.D.		
12.00-24	20	VZE40s	L5S	8.5	315	1275	3750	550
17.5-25	20	VZE40s	L5S	14.00/1.5	445	1440	5000	400
18.00-25	36	VZE40s	L5S	13.00/2.5	498	1673	8750	575
26.5-25	32	VZE40s	L5S	22.00/3.0	673	1798	10000	350
29.5-25	40	VZE40s	L5S	25.00/3.5	749	1921	16000	400
29.5-29	40	VZE40s	L5S	25.00/3.5	749	2023	15000	475



VZPTs



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (kg)		Air Pressure (Kpa)	
					S.W.	O.D.	10KM	50KM	10KM	50KM
1800-25	40	VZPTs	L5s	13.00/2.5	498	1685	27600	20600	1100	960



Industrial Tires

Skidsteer Tires

Backhoe Loader Tires

Compactor Tires

Military Tires



VZSS1



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					O.D.	S.W.		
10-16.5	10	VZSS1	SKID STR.	8.25	773	264	2135	520
12-16.5	12	VZSS1	SKID STR.	9.75	831	307	2865	550
14-17.5	12	VZSS1	SKID STR.	10.5	921	349	3430	450
15-19.5	12	VZSS1	SKID STR.	11.75	1019	389	4170	410
11L-16	12	VZSS1	SKID STR.	8	838	279	1250	440
23X8.5-12	6	VZSS1	SKID STR.	7	574	213	820	340
27X8.5-15	8	VZSS1	SKID STR.	7	678	213	825	410
27X10.5-15	8	VZSS1	SKID STR.	8.5	691	259	865	410
12.5/70-16	8	VZSS1	SKID STR.	10	848	316	1645	260
17.5/65-20	10	VZSS1	SKID STR.	14	1094	448	3195	240



VZSS2



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					O.D.	S.W.		
10-16.5	12	VZSS2	SKID STR.	8.25	264	773	2375	620
12-16.5	14	VZSS2	SKID STR.	9.75	307	831	3075	620





VZSS3



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					O.D.	S.W.		
10-16.5	12	VZSS3	SKID STR.	8.25	264	773	2375	620
12-16.5	14	VZSS3	SKID STR.	9.75	307	831	3075	620
1200-16	10	VZSS3	SKID STR.	8.5	262	880	1600	420



VZSS4



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					O.D.	S.W.		
10-16.5	12	VZSS4	SKID STR.	8.25	264	773	2375	620
12-16.5	14	VZSS4	SKID STR.	9.75	307	831	3075	620





VZSS5



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					O.D.	S.W.		
10-16.5	12	VZSS5	SKID STR.	8.25	264	773	2375	620
12-16.5	14	VZSS5	SKID STR.	9.75	307	831	3075	620
10R16.5	12	VZSS5	SKID STR.	8.25	264	773	2375	620
12R16.5	14	VZSS5	SKID STR.	9.75	307	831	3705	620



Agricultural & Impliment

Tractor Tires

Implement Tires

Irrigation Tires



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					O.D.	S.W.		
23.1-26	12	VZR1	R1	DW20	587	1605	3610	170
20.8-38	12	VZR1	R1	W18L	528	1835	4000	200
18.4-38	12	VZR1	R1	W16L	467	1755	3575	230
18.4-34	12	VZR1	R1	W16L	467	1655	3375	230
18.4-30	12	VZR1	R1	W16L	467	1550	3180	230
18.4-28	12	VZR1	R1	W16L	467	1500	3135	220
15.5-38	10	VZR1	R1	W14L	395	1570	2320	230
16.9-34	10	VZR1	R1	W15L	430	1585	2605	200
16.9-30	12	VZR1	R1	W15L	430	1485	2730	240
16.9-28	10	VZR1	R1	W15L	430	1435	2380	200
14.9-28	10	VZR1	R1	W13	378	1365	2120	230
13.6-28	10	VZR1	R1	W12	345	1310	1910	250
12.4-28	8	VZR1	R1	W11	315	1260	1510	230
14.9-24	8	VZR1	R1	W15L	430	1335	2040	170
13.6-24	8	VZR1	R1	W12	345	1210	1545	210
14.9-30	10	VZR1	R1	W13	378	1415	2190	230
13.6-24	10	VZR1	R1	W12	345	1210	1790	250
12.4-24	8	VZR1	R1	W11	315	1160	1415	230
11.2-24	8	VZR1	R1	W10	285	1105	1225	240
13.6/12-38	12	VZR1	R1	W11	312	1583	2115	240
9.5-24	8	VZR1	R1	W8	240	1050	1110	280
8.5-20	8	VZR1	R1	5.50F	205	902	885	300
8.3-20	6	VZR1	R1	W7	210	895	695	240
7.50-20	6	VZR1	R1	5.50F	205	910	760	210
7.50-16	6	VZR1	R1	5.50F	205	810	650	210
6.00-12	6	VZR1	R1	4.50E	165	640	405	250
6.00-14	6	VZR1	R1	4.50E	165	690	450	250
600-16	6	VZR1	R1	4.50E	165	745	495	250
15.5/80-24	12	VZR1	R1	W13	394	1240	2900	300





VZR3



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
					S.W.	O.D.		
23.1-26	12	VZR3	R3	DW20	587	1581	3875	220
18.4-26	12	VZR3	R3	DW16	467	1426	2985	230



VZS428



SIZE	PR	PATTERN	TRA	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	
					S.W.	O.D.		
14.00-20	18	VZS428	DESERT	10.00W	375	1220	4000	500
16.00-20	18	VZS428	DESERT	10.00W	420	1370	4000	600
400/60-15.5	14	VZS428	DESERT	13	405	875	2900	360
500/50-17	14	VZS428	DESERT	W16	500	950	3250	280





VZR41A



SIZE	PR	PATTERN	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
				O.D.	S.W.		
12.5/80-18TL	12	VZR41A	11	350	965	2625	370
10.5/80-18	12	VZR41A	9	274	885	2160	440



VZR42A



SIZE	PR	PATTERN	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
				O.D.	S.W.		
16.9-24	12	VZR42A	W15L	1309	430	2420	230
16.9-28	12	VZR42A	W15L	1410	430	2585	230
17.5L-24	12	VZR42A	W15L	1241	445	1950	230
19.5L-24	12	VZR42A	DW16	1314	495	2145	210
21L-24	12	VZR42A	DW18	1370	533	2410	190
18.4-26	12	VZR42A	DW16	1426	467	2985	230





Forklift & ATV Tires

Utility Work Tires

Forklift Tires



FORKLIFT



SIZE	PR	PATTERN	Standard Rim	New inflated Size (mm)		Maximum Load (Kg)	Air Pressure (Kpa)
				O.D.	S.W.		
5.00-8	10	FORKLIFT	3.50D	137	470	970	1000
6.00-9	12	FORKLIFT	4.00E	160	540	1505	860
7.00-9	10	FORKLIFT	5.00S	190	590	1995	860
6.50-10	12	FORKLIFT	5.00F	170	590	1655	790
7.00-12	12	FORKLIFT	5.00S	190	676	2375	860
8.25-12	12	FORKLIFT	6.5	235	765	3060	720
28*9-15(815-15)	14	FORKLIFT	7.00	220	710	3050	970
700-15	12	FORKLIFT	5.5	200	750	2870	860
7.50-15	12	FORKLIFT	6.0	215	780	3075	790
8.15-15	16	FORKLIFT	7.00	220	710	3050	970
8.25-15	14	FORKLIFT	6.50	235	840	3775	830
9.00-20	18	FORKLIFT	7.00	262	1022	2700	740
10.00-20	18	FORKLIFT	7.50	278	1055	6085	790
12.00-20	20	FORKLIFT	8.50	315	1125	7975	890



ATV-6



SIZE	PATTERN	Overall Diame-ter (mm)	Section Width (mm)	Pressure (Psi)	Max load(LBS)
18x8.5-8-4PR	ATV-6	410	200	22	815



VIZZONI

TIRES

Vizzoni Auto United DMCC

1702, 17th Floor, Preatoni Tower (Dubai Star), Cluster L, Jumeirah Lake Towers, Dubai
United Arab Emirates, Phone : +971 483 59706 Mob : +971 545088212 Email : sales@vizzoni.com