

VIZZONI

TIRES



**STEADY &
SMOOTH PERFORMANCE**

TRUCK & BUS RADIAL TIRES

CATALOGUE 2025

THE JOURNEY **BEGINS** HERE

CONTENTS

VZ545, VZ546, VZ548, VZ550.....	01
VZ651, VZ652	02
VZ653, VZ654	03
VZ655, VZ656	04
VZ657, VZ658	05
VZ659, VZ660	06
VZ662, VZ663, VZ665	07
VZ682, VZ685 GOLD, VEER786 PLUS.....	08

An aerial photograph of a two-lane asphalt road winding through a dense, lush green forest. A semi-truck with a green and white trailer is driving on the road, moving away from the viewer. Sunlight filters through the trees, creating a warm, golden glow on the road and foliage.

WELCOME TO THE **NEW WORLD** VIZZONI

ABOUT VIZZONI

With more than 10+ years of worldwide presence, VIZZONI TIRES is committed to providing remarkable quality and high safety standards for tires of every kind. Our brand promises to go above and beyond to provide you with the best-performing tires.

A smooth affair - Vizzoni Tires aims to offer a driving experience that delivers the utmost comfort, excellent braking mechanism, and maximum safety to those on-road.

We cater to all your demands by offering a versatile and vast range to pick from as per your need.

Vizzoni Tires has a comprehensive understanding of tires and unlocks the potential of "one brand, several options". Hence we offer solutions for Passenger Car Radials, High Performance, Ultra High Performance, 4x4 & SUV, VAN - Commercial, Truck Bus Radial, OTR - Radial, OTR - Bias, Industrial & Agricultural.



VZ545



- ▶ Increased sidewall strenght and low rolling resistance
- ▶ Extreme ease in measuring sidewall wear
- ▶ Improved grip on wet and slippery surface

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
215/75R17.5	18	135/133	L	6.00	12.0
235/75R17.5	18	143/141	L	6.75	13.0
9.5R17.5	18	143/141	L	6.75	13.5



VZ646



- ▶ Wider and horizontal grooves greatly improve self-cleaning ability and driving performance
- ▶ The interconnecting ribs between Pattern blocks reduce the movement and decrease Uneven wear
- ▶ High wear resistance and low heat generation of the tread rubber ensure long service life

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDERD RIM	OTD (MM)
295/80R22.5	18	152/149	L	9.00	20.0
11R22.5	16	146/143	L	8.25	20.0



VZ648



- ▶ The VAI wear indicator system helps drivers evaluate tire wear and identify early irregular wear problems. The crown is designed with a spring sleeve to ensure a good appearance
- ▶ The proportion of grooves and blocks was readjusted to reduce crown deformation after inflation
- ▶ The increased lines on the pattern grooves effectively prevent stone retention

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDERD RIM	OTD (MM)
295/80R22.5	20	154/150	K	9.00	17.5



VZ650



- ▶ Optimized Tread profile and wider-deeper pattern for long life
- ▶ Four solid longitudinal zig zag grooves & special sipes for fuel efficiency & safety
- ▶ High-tensile casing steel cord for durability & retreading

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
12R22.5	18	152/149	M	9.00	15.0



VZ651



- ▶ Enclosed shoulder to prevent eccentric wear
- ▶ Low rolling resistance and low noise
- ▶ Excellent anti sideslip performance
- ▶ Four longitudinal grooves & smooth shoulder for outstanding performance at high speeds

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
315/80R22.5	20	156/150	M	9.00	15.0



VZ652



- ▶ Enclosed shoulder to prevent eccentric wear
- ▶ Low rolling resistance and low noise
- ▶ Excellent anti sideslip performance
- ▶ Four longitudinal grooves & smooth shoulder for outstanding performance at high speeds

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
12R22.5	18	152/149	M	9.00	17.0



VZ653



- ▶ Geometrically designed grooves for self-cleaning, better traction and even wear
- ▶ Groove bottoms design avoids stone trapping
- ▶ Aggressive directional tread with robust block design for extra traction on various road conditions

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
12R22.5	18	152/149	L	9.00	18.0
13R22.5	20	156/150	L	9.75	18.0
315/80R22.5	20	156/150	L	9.00	20.0



VZ654



- ▶ Bionic pattern provides excellent driving and braking performance
- ▶ Four advanced longitudinal grooves and pressure control technology ensure comfortable driving experience
- ▶ Abrasion resistant compound provides long mileage & to prevents eccentric wear

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
7.50R16	16	125/121	L	6.00G	13.5



VZ655



- ▶ Four rib tread design with zigzag patterns for all position application
- ▶ Deep shoulder grooves for maximum traction in rough terrains
- ▶ Extra-deep tread design and unique compound for extended tread life
- ▶ Cut and chip resistant rubber compounds

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDERD RIM	OTD (MM)
7.50R16	14	122/118	L	6.00G	13.5
11R22.5	18	148/145	M	8.25	15.0
13R 22.5	18	154/151	L	9.75	17.5
315/80R 22.5	20	156/150	M	9.00	16.0
11.00R20	18	152/149	K	8.00	17.5
1200R 24	20	160/157	K	8.50	15.0
1200R 20	20	156/153	K	8.50	17.5



VZ656



- ▶ Rib pattern designed to deliver remarkable traction and stability
- ▶ Wide grooved shoulders designed for even weight distribution and to resist uneven wear
- ▶ Stone ejectors built into grooves for notable stone chipping resistance and excellent tread life

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
11R22.5	18	148/145	M	8.25	15.0
295/80R22.5	18	152/149	M	9.00	15.0
315/80R22.5	20	156/150	M	9.00	15.0



VZ657



- ▶ Directional tread design for superior traction and all-weather handling
- ▶ Special decoupling groove for steer positions
- ▶ 5-rib design and extra wide shoulders for high speed stability

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
385/65R22.5	24	164	K	11.75	14.5



VZ658



- ▶ Low heat generating compound in tread base provides excellent durability and wear & cut resistance
- ▶ Upper tread formula for increased cut, tear & abrasion resistance
- ▶ 3 middle groove design for excellent guiding & drainage properties - suitable for guiding & drag wheel positions

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
11R22.5	18	148/145	M	8.25	18.0
12R22.5	18	152/149	L	9.00	18.5
13R22.5	18	154/151	L	9.75	20.5



VZ659



- ▶ Interlocking shoulder for superior weight distribution and lateral support at high speed
- ▶ Tread block design for enhanced comfort and reduced noise
- ▶ Bladed tread pattern for improved off-road traction and grip

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
12.00R24	20	160/157	K	8.50	14.5




VZ660



- ▶ Provide excellent anti-skid and handling performance
- ▶ Effectively increase tire's driving performance, reduce heat generation and improve durability
- ▶ Reduce tread heat generation, and deliver excellent durability
- ▶ Provide excellent wear resistance performance.

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
385/65R22.5	24	164	K	11.75	14.5

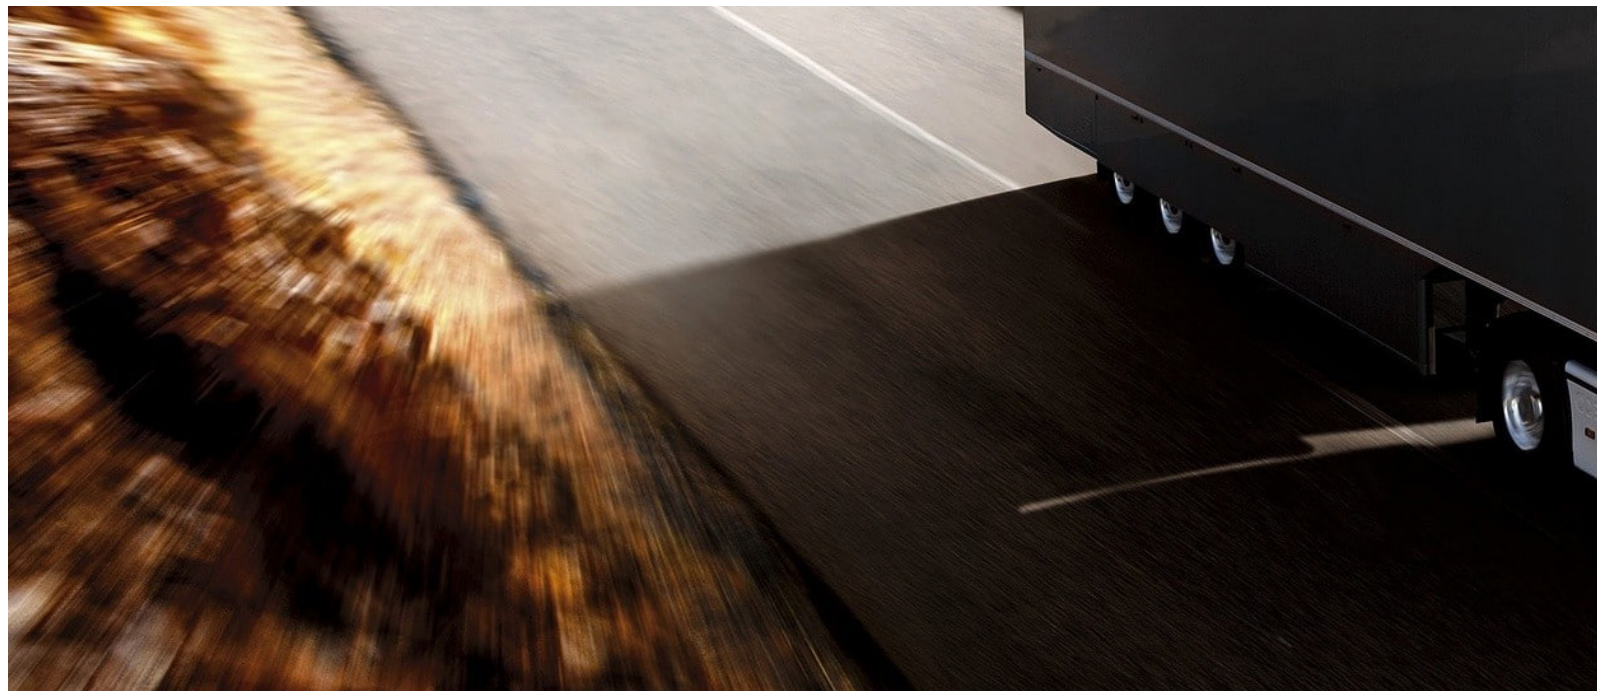

VZ662



- ▶ Wider and horizontal grooves greatly improve self-cleaning ability and driving performance
- ▶ The interconnecting ribs between pattern blocks reduce the movement and decrease partial wear
- ▶ High wear resistance and low heat generation of the tread rubber ensure long service life

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
315/80R22.5	20	156/150	M	9.00	15.0



VZ663



- ▶ Optimized tread block pitch sequence offers better traction and acoustic comfort.
- ▶ Optimized design to reduce noise generation.
- ▶ Optimum grip on various road conditions.

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
315/80R22.5	22	158/156	J	9.00	22.0



VZ665



- ▶ Wider and horizontal grooves greatly improve self-cleaning ability and driving performance
- ▶ The interconnecting ribs between pattern blocks reduce the movement and decrease partial wear
- ▶ High wear resistance and low heat generation of the tread rubber ensure long service life

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
13R22.5	20	156/153	L	9.75	18.0



VZ682



- ▶ Big angle design for the main groove, to prevent transformation and groove cracking
- ▶ Variable angle design of groove bottom will efficiently prevent stone retention, improved service life
- ▶ Arc shape design of the groove makes the pattern look better, keeping the pattern rigidity the center sipes design to balance the load and tread wear, to avoid groove bottom cracking

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
12.00R24	20	160/157	K	8.50	14.5



VZ685 GOLD



- ▶ Four advanced longitudinal grooves and pressure control technology
- ▶ Provides excellent anti-skid and handling performance
- ▶ Reduce tread heat generation and wear resistance performance

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
7.50R16	14	122/118	L	6.00G	12.5



VEER786 PLUS



- ▶ Improved irregular wear resistance
- ▶ Longer wear life & service life
- ▶ Wide footprint for higher traction and comfort

TIRE SIZE	PR	LOAD INDEX	SPEED SYMBOL	STANDARD RIM	OTD (MM)
325/95R24	22	162/160	K	9	15



VIZZONI

TIRES

Vizzoni Auto United DMCC

1702, 17th Floor, Preatoni Tower (Dubai Star), Cluster L, Jumeirah Lake Towers, Dubai
United Arab Emirates, Phone : +971 483 59706 Mob : +971 545088212 Email : sales@vizzoni.com